

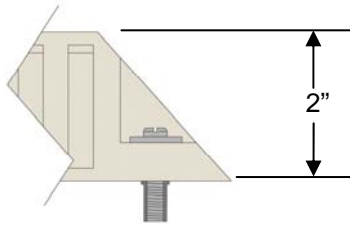


AEGIS

Anti-Entrapment Shield

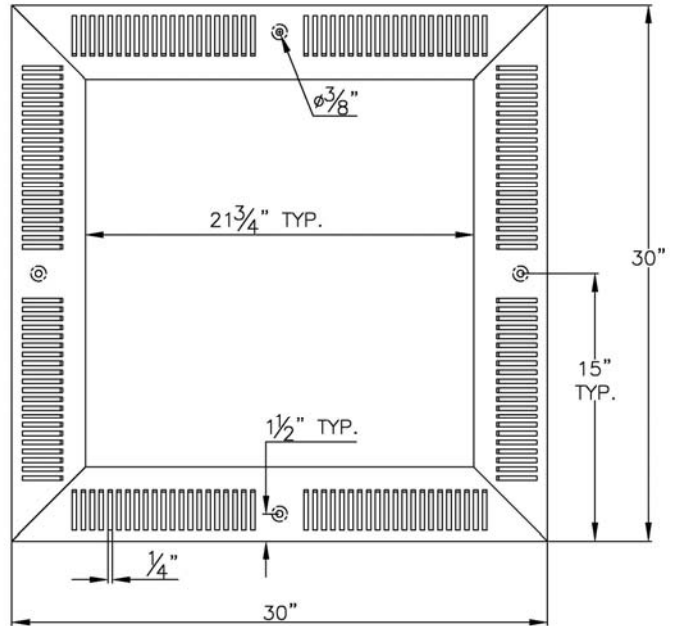

1/4" dia S.S. drop-in anchors with 1/4" S.S. fasteners & washers

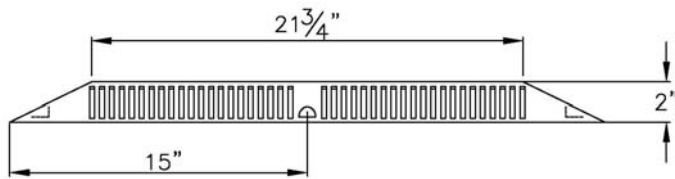

Notes:

- ASME A112.19.8.a-2008 VGB-2008 & NSF Certified
- Easily installed over existing main drains
- Prevents bather entrapment
- Fiberglass construction
- No bonding required
- Slip resistant surface
- Includes stainless steel hardware
- Wall flowrate: 1120 GPM
- Floor flowrate: 1432 GPM
- Life: 15 years – submerged outlet



| Part # | Overall Size L x W | Open Area | Max. Flow Rate @ 1.5 F.P.S. |
|---------|--------------------|------------------------|-----------------------------|
| 3030AEC | 30"X30" | 128.21 in ² | 600 GPM |

PG-6-6
N-4/9/09