



Environmentally Friendly
Commercial Pool Products



ChlorKing® Inc.

6/1/09

Volume 1, Rev 2

THE CLEAR SOLUTION

P.O. Box 80823

Atlanta, Georgia 30366

Tel: 800-536-8180

Fax: 770-685-6576

www.chlorking.com

TABLE OF CONTENTS

Saline Chlorination Systems – Reverse Polarity.....	3
Saline Chlorination Systems – Mini Model.....	4
Saline Chlorination Systems – Forward Polarity.....	5
X-GEN On-site Chlorine Generators.....	6
Toroidal Conductivity Controllers and Meters.....	7
Saturated Salt Feeders.....	8
Ultra Violet Light Systems.....	9
Schematics and Dimensional Information.....	10
Power Supply Dimensions (Models 2.5 – 10lb).....	11
Power Supply Dimensions (Models 15 – 25lb) and Cell Tubes.....	12
Saturated Salt Feeder and Conductivity Controller Dimensions.....	13
Plumbing Schematic.....	14

REVERSE POLARITY SALINE CHLORINATION SYSTEMS



ChlorKing® industrial grade saline chlorination system featuring reverse polarity, water-cooled power supply, pre-mounted on aluminum backboard.

Clear PVC, self cleaning, high output reaction chamber for easy viewing and maintenance.

Featuring integrated side stream flow switch and isolation valves. ORP interface with all chemical controllers.

Systems carry NSF-50 and UL-1081 certifications.

3-year limited ChlorKing® factory warranty.

MODEL	DESCRIPTION	POWER
CHLOR 3.5V	3.5lb / day vertical system	208 - 220v
CHLOR 3.5H	3.5lb / day horizontal system	208 - 220v
CHLOR 5.0V	5.0lb / day vertical system	110v
CHLOR 5.0H	5.0lb / day horizontal system	110v
CHLOR 7.5V	7.5lb / day vertical system	208 - 220v
CHLOR 7.5H	7.5lb / day horizontal system	208 - 220v
CHLOR 10V	10lb / day vertical system	208 - 220v
CHLOR 10H	10lb / day horizontal system	208 - 220v
CHLOR 15H	15lb / day horizontal system	208 - 220v
CHLOR 20H	20lb / day horizontal system	208 - 220v
CHLOR 25H	25lb / day horizontal system	208 - 220v

MINI – REVERSE POLARITY SALINE CHLORINATION SYSTEMS



ChlorKing® MINI industrial grade saline chlorination system featuring reverse polarity, water-cooled power supply, Single power box model.

Clear PVC, self cleaning, high output reaction chamber for easy viewing and maintenance.

Featuring integrated side stream flow switch and isolation valves. ORP interface with all chemical controllers.

Systems carry NSF-50 and UL-1081 certifications.

3-year limited ChlorKing® factory warranty.

MODEL	DESCRIPTION	POWER
MINI 1.25	1.25lb / day system	110v
MINI 2.5	2.5lb / day system	110v

FORWARD POLARITY SALINE CHLORINATION SYSTEMS



ChlorKing® industrial grade saline chlorination system featuring forward polarity, water-cooled power supply.

Components separate using “plug ‘n play” connectors for easy installation.

Clear PVC, high output reaction chamber for easy viewing and maintenance. (Weekly cleaning of the electrode stack required using the included ChlorKing® acid was system)

Featuring integrated side stream flow switch and isolation valves.

ORP interface with all chemical controllers. ChlorKing® 5000 conductivity controller included.

Systems carry NSF-50 and UL-1081 certifications.

3-year limited ChlorKing® factory warranty.

MODEL	DESCRIPTION	POWER
CLASSIC 5.0	5.0lb / day system	208 – 220v
CLASSIC 7.5	7.5 / day system	208 – 220v
CLASSIC 10	10lb / day system	208 – 220v
CLASSIC 15	15lb / day system	208 – 220v
CLASSIC 20	20lb / day system	208 – 220v
CLASSIC 25	25lb / day system	208 – 220v

X-GEN ON-SITE SODIUM HYPOCHLORITE GENERATORS



ChlorKing® X-GEN on-site chlorine generators featuring forward polarity water-cooled power supply.

Water cooled industrial grade power supply components.

Features integrated side stream flow switch and isolation valves.

ORP interface with all chemical controllers. ChlorKing® 5000 conductivity controller built into power supply.

2,500ppm sodium hypochlorite produced in the generating tank.

Featuring electrically actuated diaphragm pump (included) and saturated salt feeder.

NSF-50 and UL-1081 certifications pending.

3-year limited ChlorKing® factory warranty.

MODEL	DESCRIPTION	POWER
X-GEN 20	20lb's / day on-site generation	220v
X-GEN 40	40lb's / day on-site generation	220v

TOROIDAL CONDUCTIVITY CONTROLLERS



ChlorKing® toroidal conductivity meters and controllers are a unique design combining simplicity and advanced engineering.

Salt readings displayed as ppm.

Toroidal probe never needs calibration.

Powered output allows for controller to power ChlorKing® saturated salt feeders.

Handheld version features “instant dip and read” technology.

Temperature compensated.

1-year ChlorKing® factory warranty.

MODEL	DESCRIPTION
CHLORKING 5000	Toroidal conductivity controller
CHLORKING 5000HH	Toroidal conductivity hand held meter

SATURATED SALT FEEDERS



ChlorKing® saturated salt feeders are ideal for all commercial pools with a wide variety of sizes available.

Double barrel design allows for maximum salt storage.

Standard Stenner 85gpd pump can feed 170lb's of salt into a pool per day. Upgrade to a dual head pump for 340lb's of salt per day (That's 8.5 x 40lb bags per day).

Use only rock, solar, or water softener salt with this feeder. (No pool salt allowed).

1-year ChlorKing® factory warranty.

MODEL	DESCRIPTION
SSFEEDEER 30	30 Gallons feeder
SSFEEDEER 55	55 Gallon feeder
SSFEEDEER 75	75 Gallon feeder
SSFEEDEER 100	100 Gallon feeder

LOW PRESSURE HIGH OUTPUT AMALGAM ULTRA VIOLET SYSTEMS



ChlorKing®-Sentry low pressure high output amalgam ultra violet systems are specifically designed for the commercial swimming pool industry.

Ultra reflective interior design for outstanding performance, with rugged 316L stainless steel.

254nm sterilizing wave length and 185nm oxidization wave length achieved.

Quick disconnect sleeves allows for easy access to lamps for cleaning.

13,000 hour lamp life. (Longest in the industry)


Industrial power supply with safety sensors and hour meter.

NSF-50 and UL-1081 certification pending
1-year limited factory warranty.


MODEL	DESCRIPTION	POWER	FLOW
SAG 120-A	120 watt amalgam system	110 or 220v	up to 51 gpm
SAG 240-A	240 watt amalgam system	110 or 220v	up to 120 gpm
SAG 480-A	480 watt amalgam system	110 or 220v	up to 311 gpm
SAG 720-A	720 watt amalgam system	110 or 220v	up to 525 gpm
SAG 960-A	960 watt amalgam system	110 or 220v	up to 649 gpm
SAG 1200-A	1200 watt amalgam system	110 or 220v	up to 900 gpm

SCHEMATICS AND DIMENSIONAL INFORMATION


Bypass Manifold Plumbing with ChlorKing 5000 Conductivity Controller

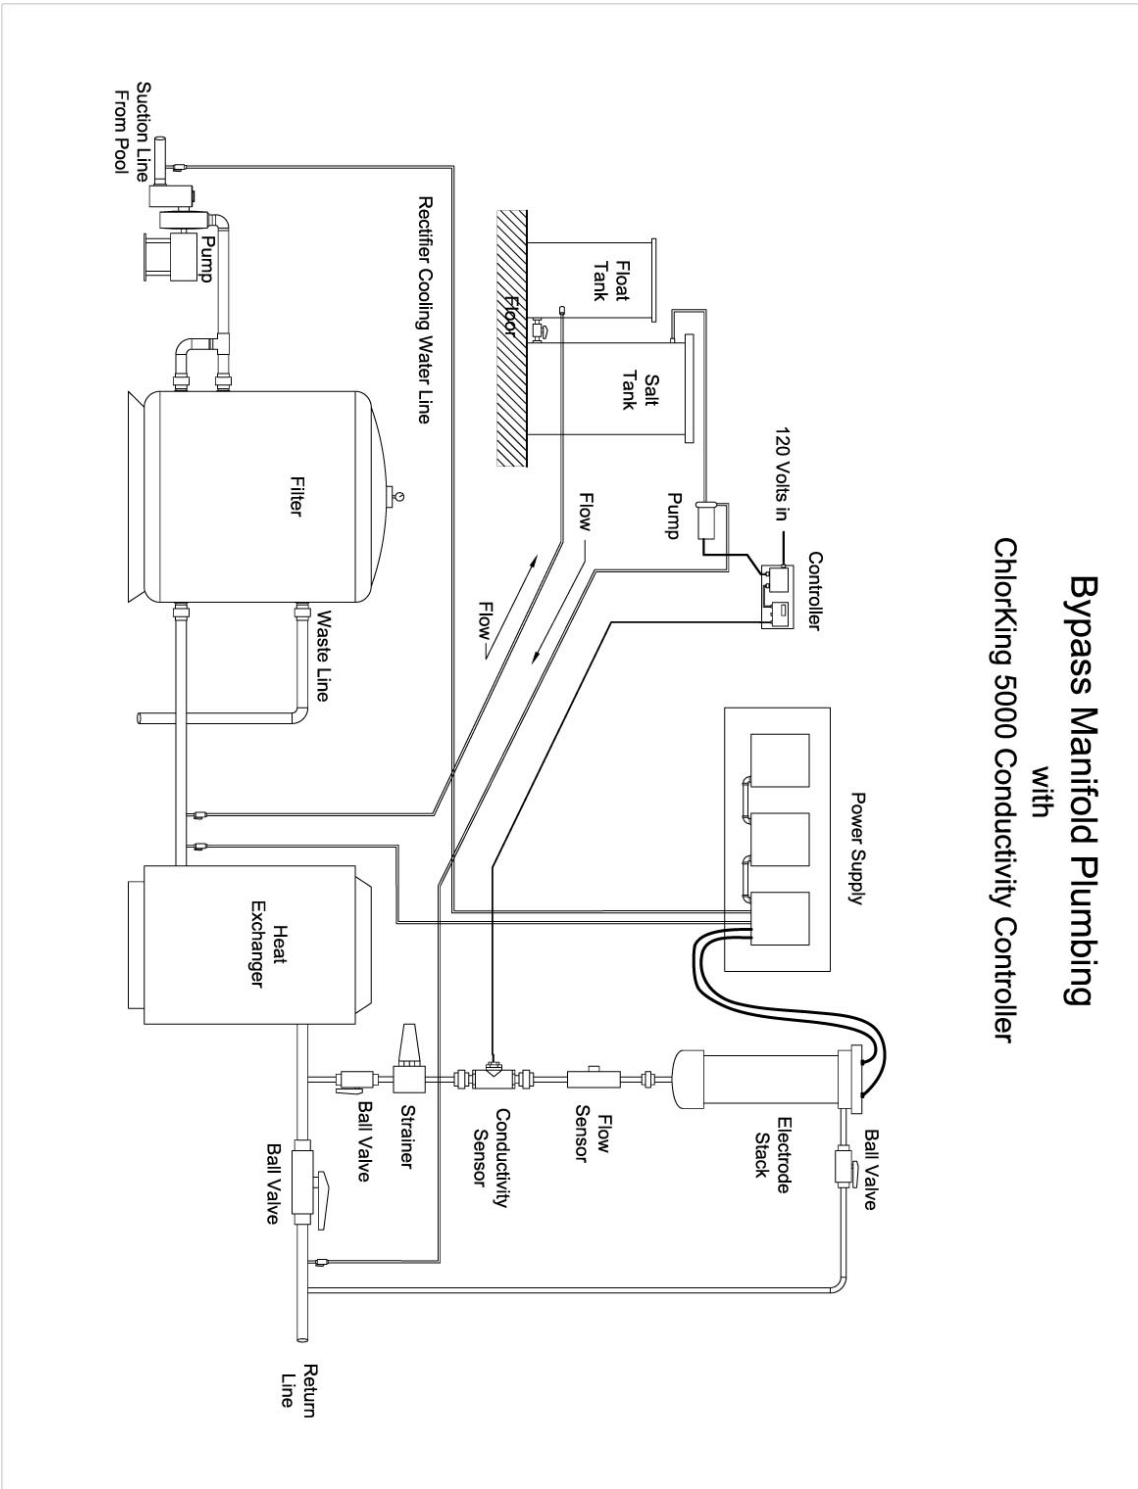


Mini - Dimensions

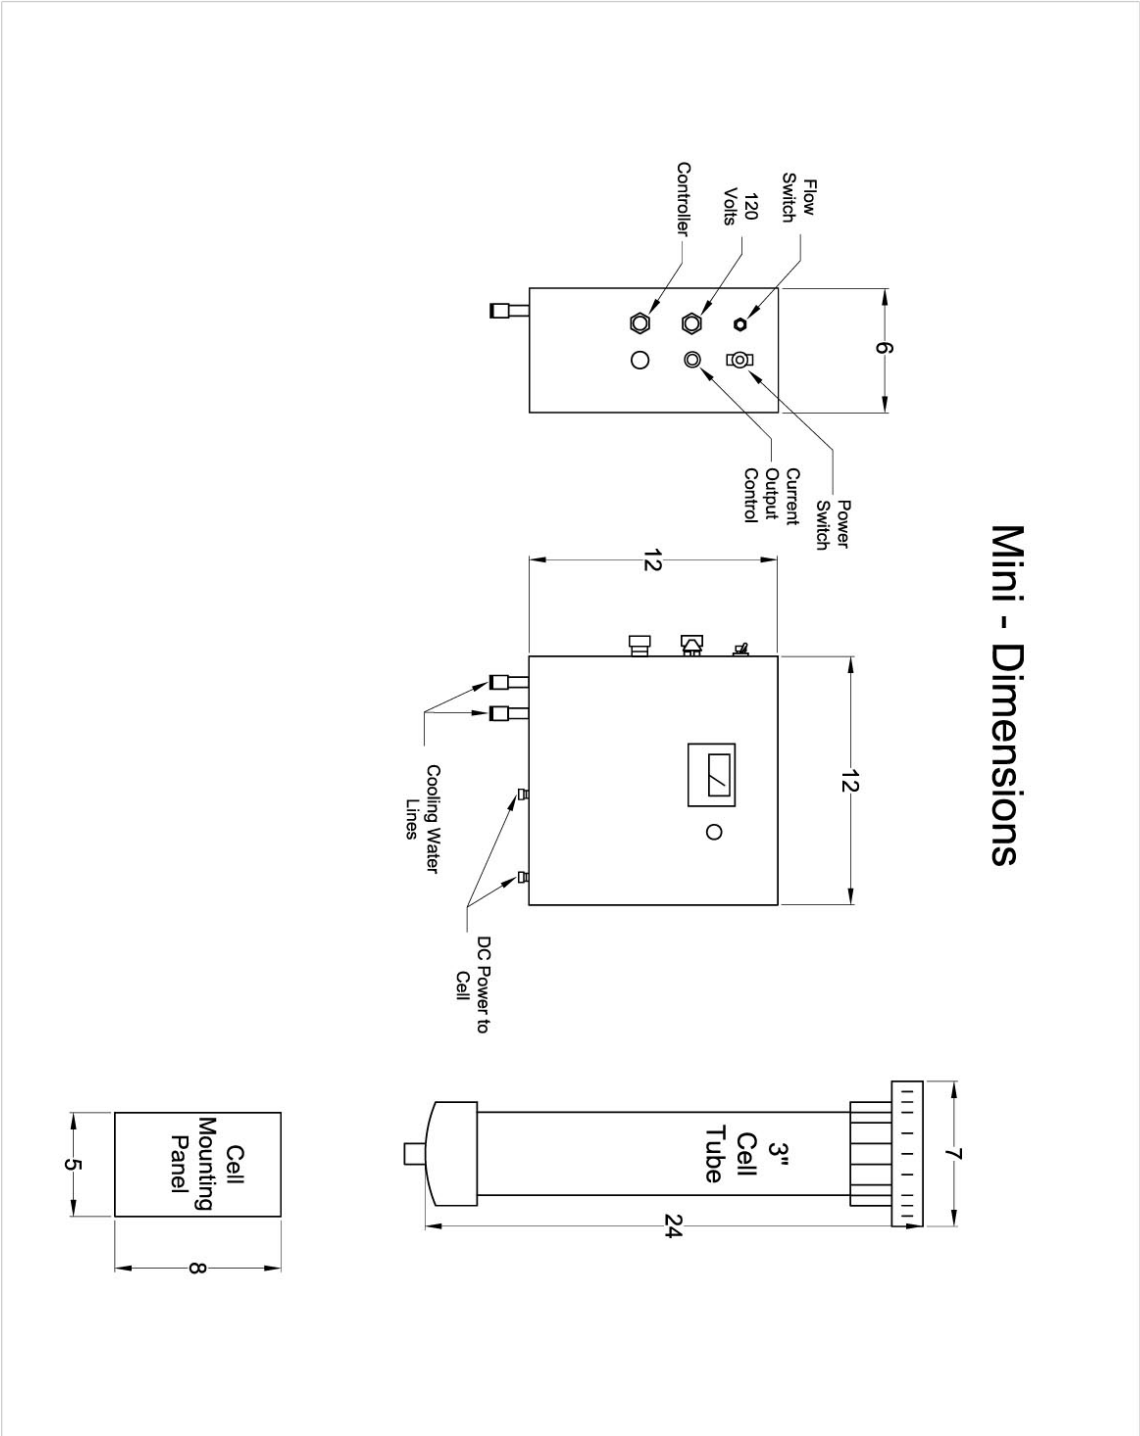


Power Supply Horizontal - Dimensions 2.5, 3.5, 5, 7.5, 10 Pound Systems

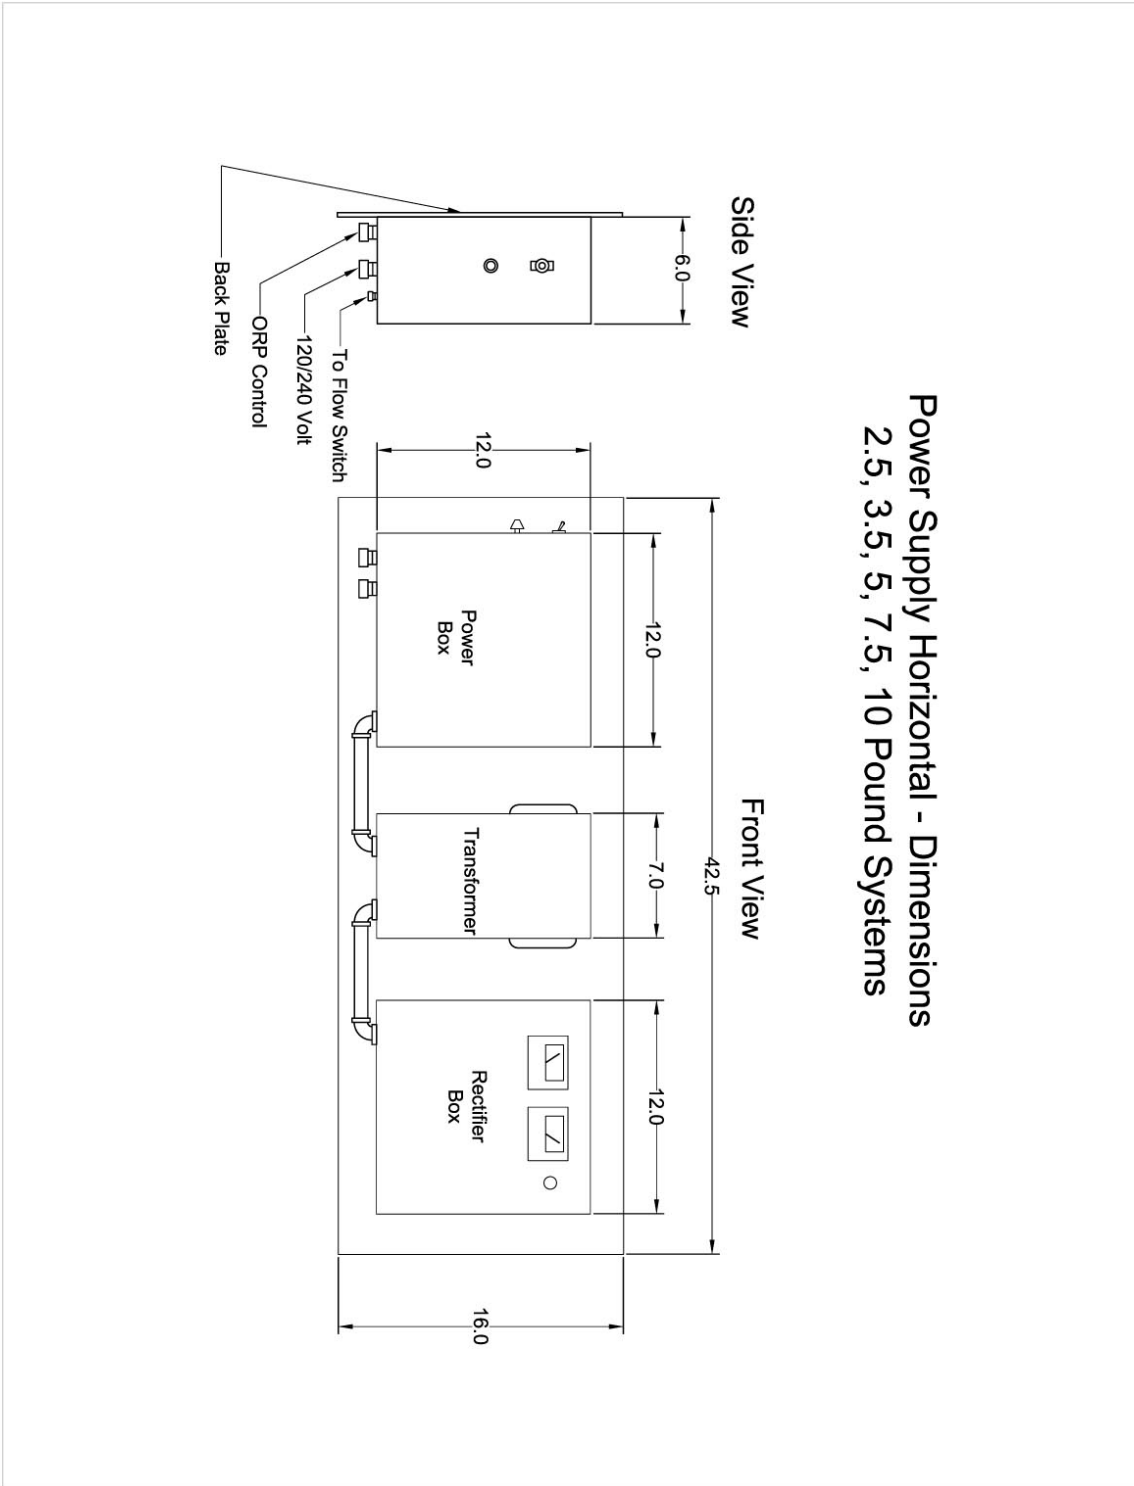





Power Supply - Vertical
2.5, 3.5, 5, 7.5, 10 Pound Systems

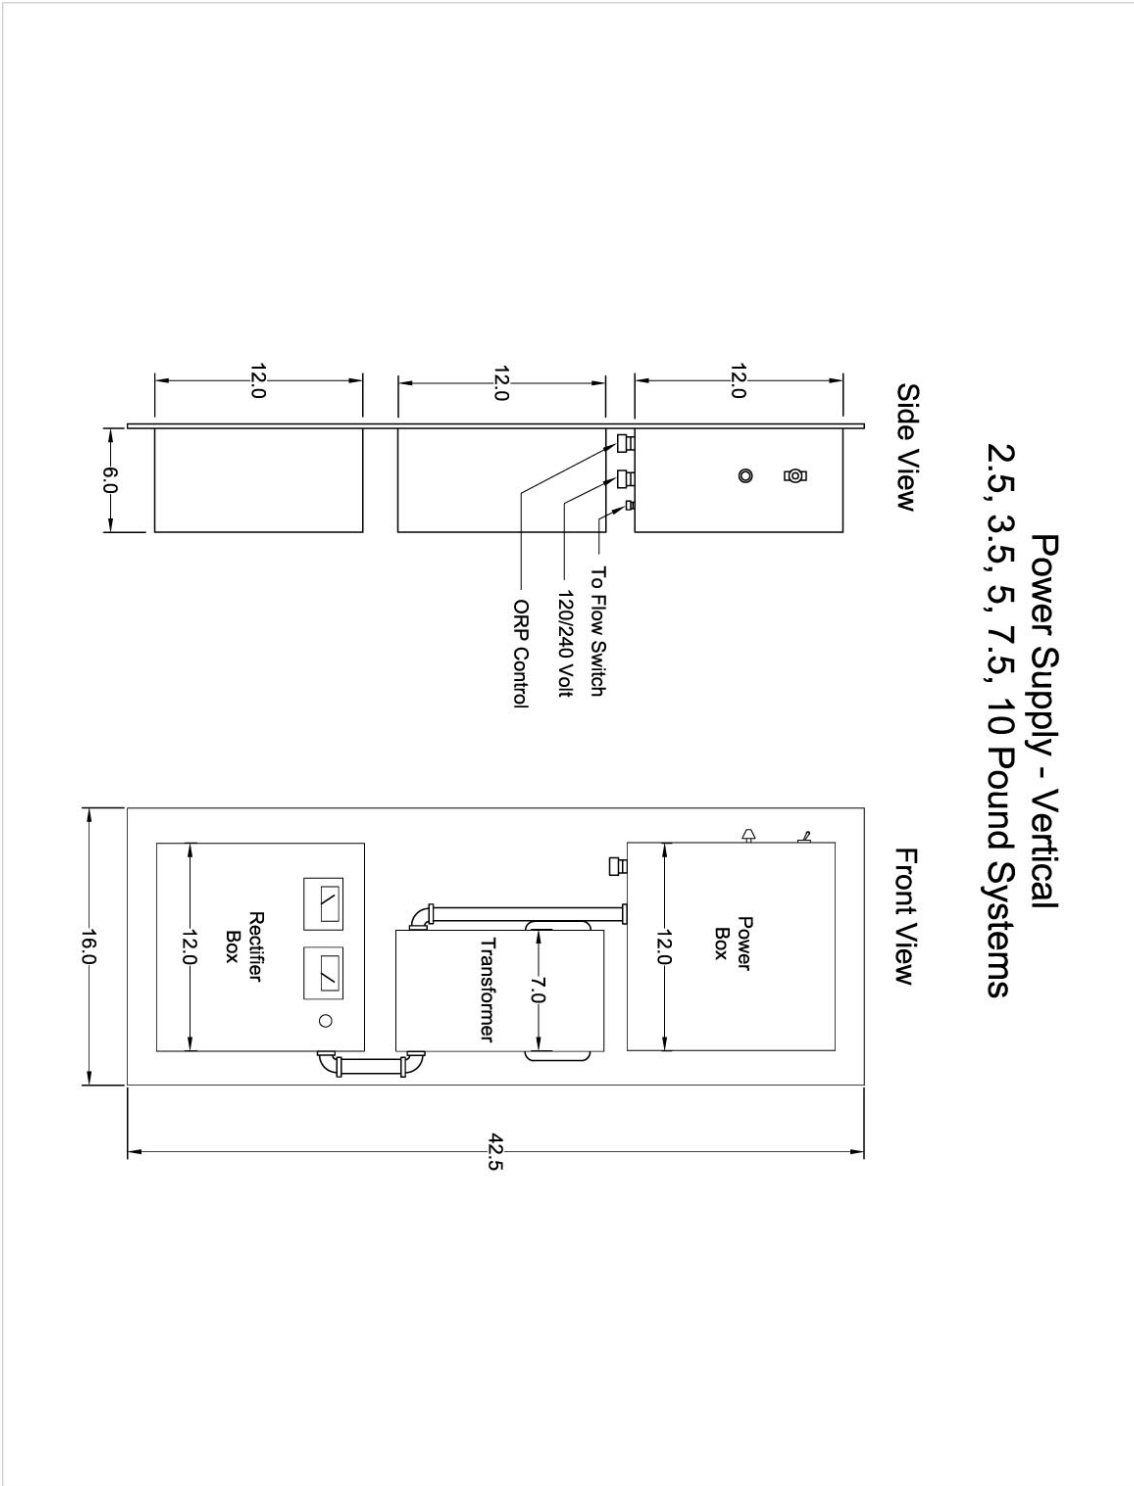



Power Supply - Dimensions 15 Pound & 25 Pound Systems

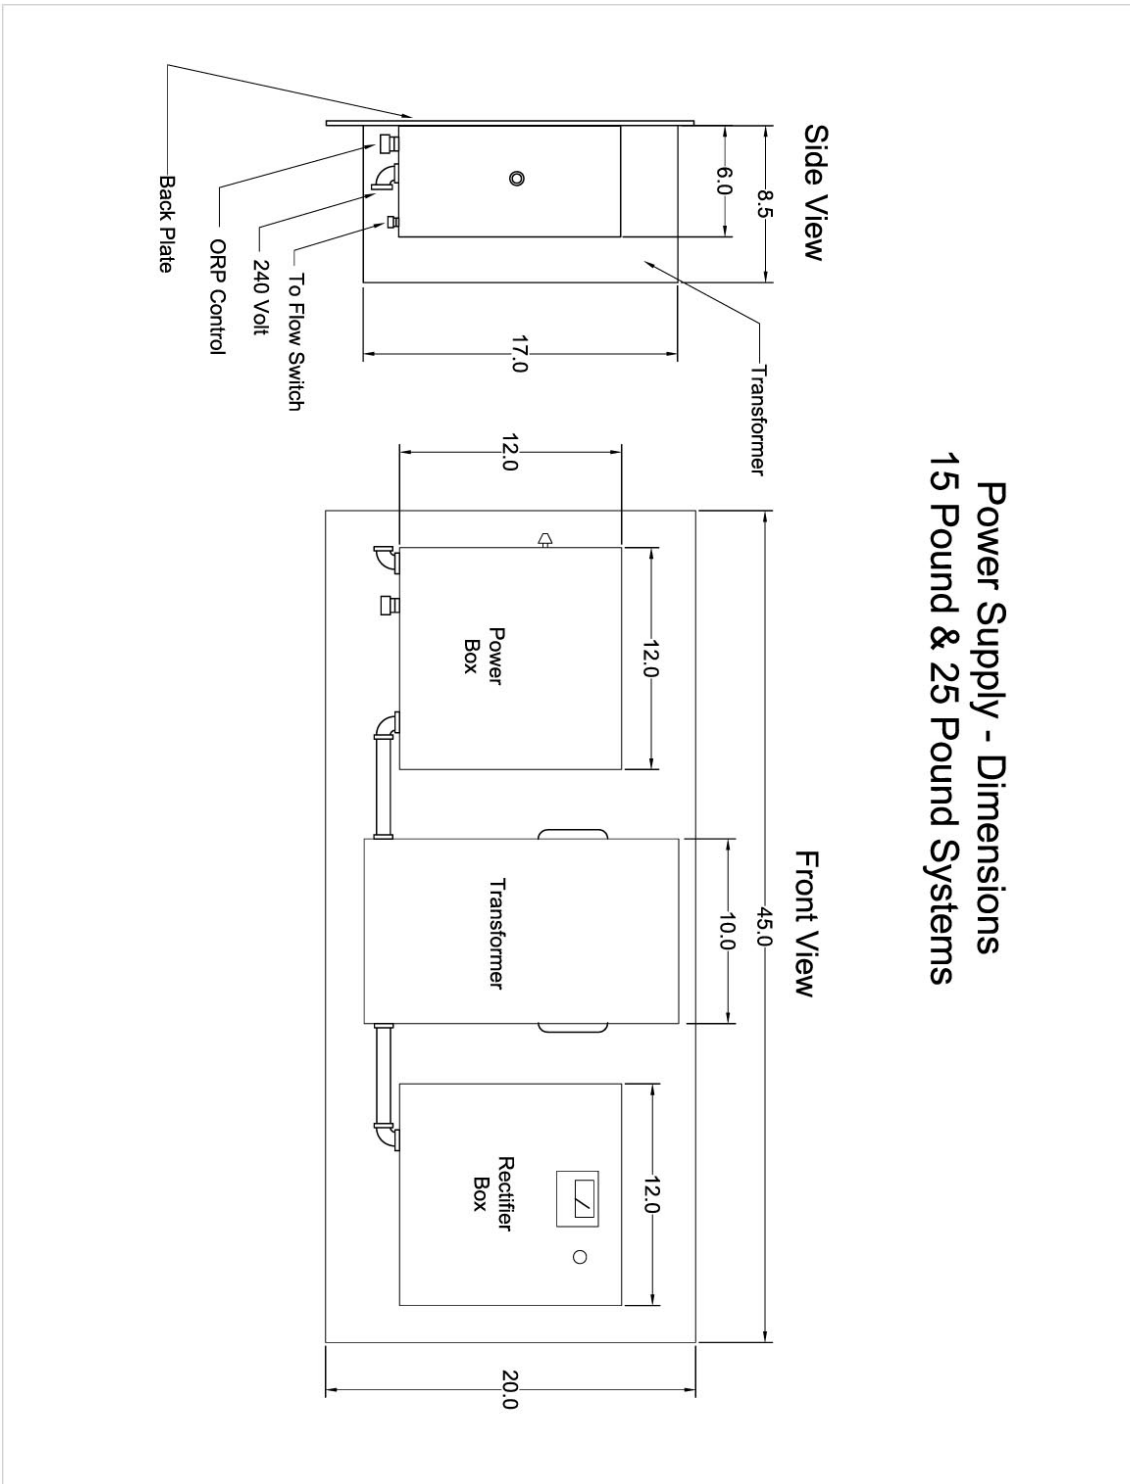

Cell Tube Dimensions

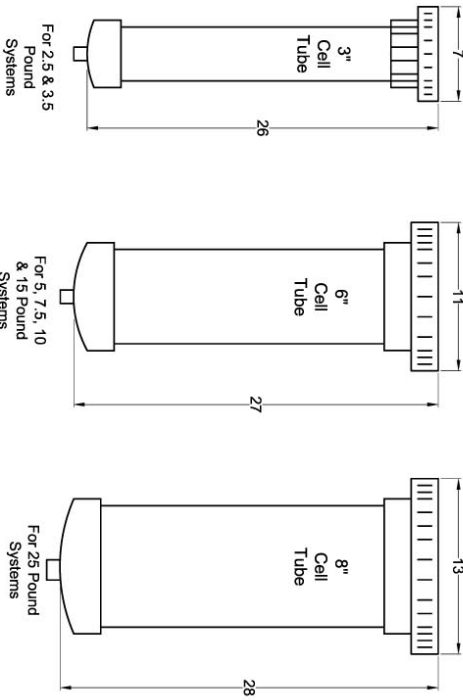

ChlorKing 5000 Conductivity Control Dimensions

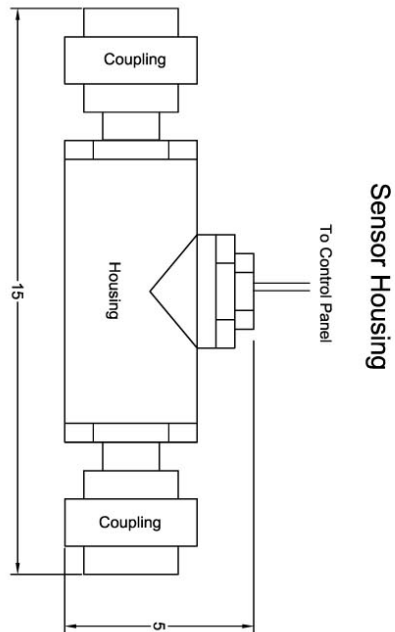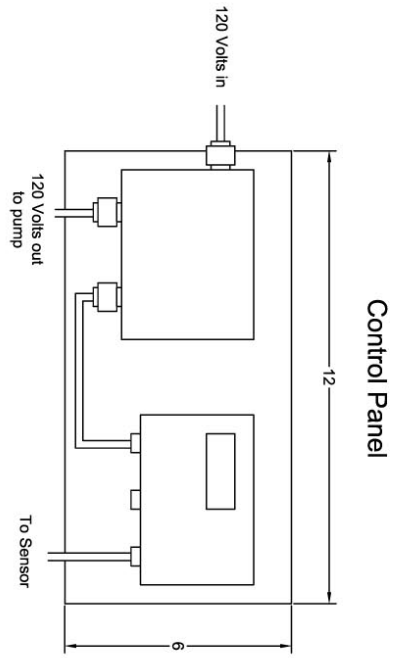

ChlorKing 5000 Tank Dimensions

